# BRAKE PRESSURE BLEEDER ADAPTER SET FOR TESLA ALL MODELS




- 1. FEATURES
- 2. SPECIFICATIONS
- 3. INSTRUCTIONS
- 4. APPLICATIONS

### 1. FEATURES

- Kit specially designed for performing power brake bleeding on Tesla vehicles
- Adapters for Tesla Model S and X, Tesla Model 3 and Y
- Aluminum-made adapter holds high pressure, suitable for Tesla working pressure at 30 psi / 2 bar
- Compatible with most brake pressure bleeder machines or tank pumps

#### 2. SPECIFICATIONS

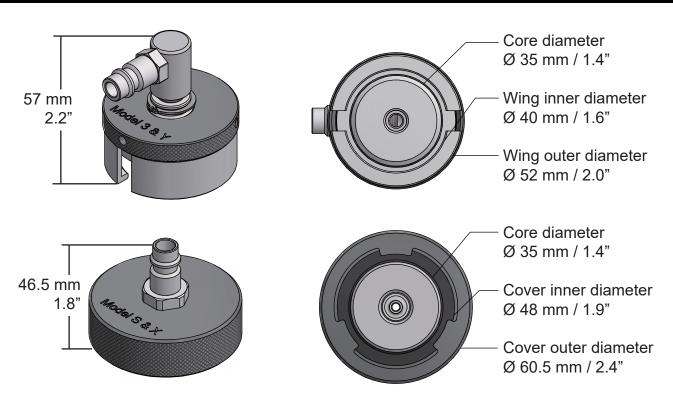

## 3. INSTRUCTIONS



- Always read the instructions carefully before using the tool
- Always check if the adapters are securely connected to master cylinder reservoirs as brake fluid leak can cause damage to other car parts or paints
- · Keep children and unauthorized persons away from the working area
- Keep working area clean and tidy, dry and free from unrelated materials
- · DO NOT allow untrained persons to use this tool kit
- Always wear eye protection that meets OSHA and ANSI Z87.1 standards
  - Always wear gloves when working with the tool
- · Always wear ear protection
- Disposal: Customers should follow local regulations to handle used/waste parts
- **1** Disconnect the 12-volt power before bleeding the brake system.
- 2 Remove the master cylinder reservoir cap.
- **3** Find a suitable adapter to connect on the reservoir.
- **4** Connect the pressure bleeding tool or machine to the adapter The pressure bleeder should be set at 30 psi / 2 bar.
- **5** Follow the instructions as specified by the pressure bleeding tool and Tesla service manual.
- **6** It is recommended to perform a leak test to ensure if the adapter is tightly and securely connected on the reservoir.



#### INSTRUCTIONS FOR ARM-TYPE ADAPTER INSTALLATION













# 4. APPLICATIONS

Make	Models	Year	Adapter
Tesla	Model S	2012-2023	Adapter Model S & X
Tesla	Model 3	2017-2023	Adapter Model 3 & Y
Tesla	Model X	2015-2023	Adapter Model S & X
Tesla	Model Y	2020-2023	Adapter Model 3 & Y